

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	1760A
V_{DRM}/V_{RRM}	1100~1800V
I_{TSM}	26 kA
I^2t	3380 $10^3 A^2S$



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1760	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$t_p=10ms$	125	1100		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			100	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			26	kA
I^2t	I^2t for fusing coordination					3380	A^2s*10^3
V_{TO}	Threshold voltage		125			0.95	V
r_T	On-state slope resistance					0.18	$m\Omega$
V_{TM}	Peak on-state voltage	$I_{TM}=3000A, F=26kN$	25			2.00	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	$V/\mu s$
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 2500A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			200	$A/\mu s$
Q_{rr}	Recovery charge	$I_{TM}=2000A, t_p=200\mu s, di/dt=-20A/\mu s,$ $V_R=50V$	125		1500		μC
I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.8		3.0	V
I_H	Holding current			20		300	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 26kN				0.018	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.004	
F_m	Mounting force			21		30	kN
T_{stg}	Stored temperature			-40		140	$^{\circ}C$
W_t	Weight				590		g
Outline		KT54cT55					

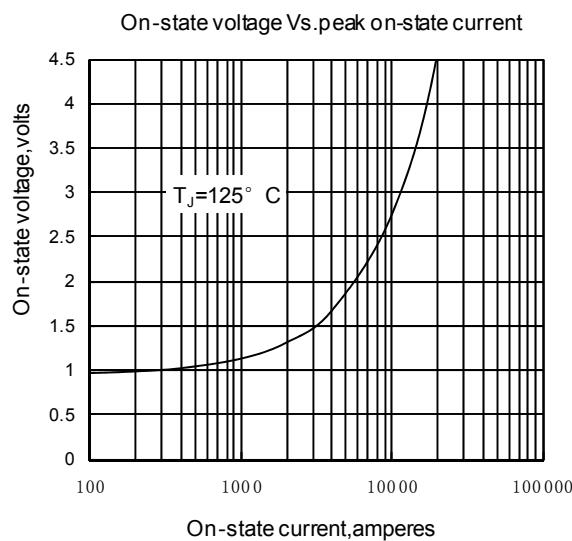


Fig1

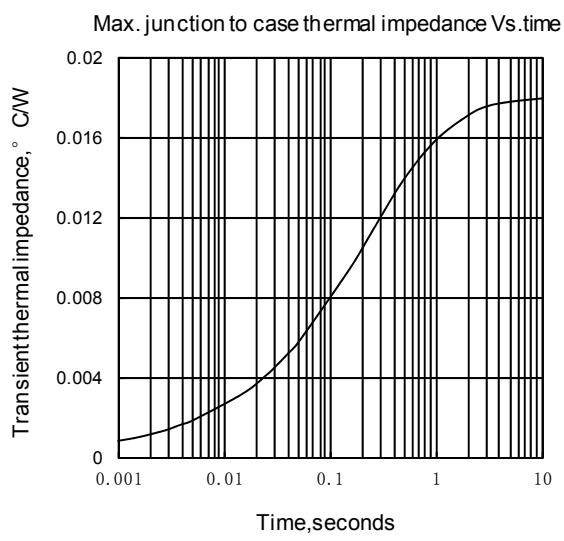


Fig2

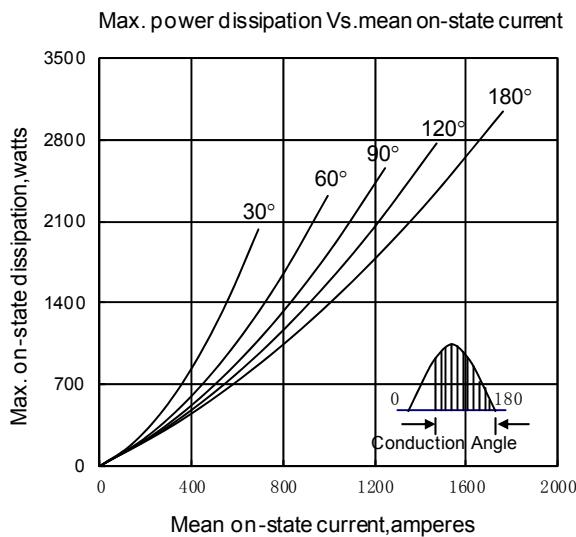


Fig3

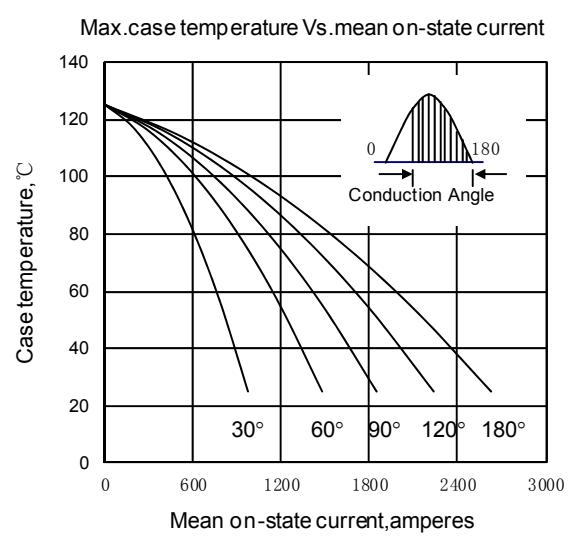


Fig4

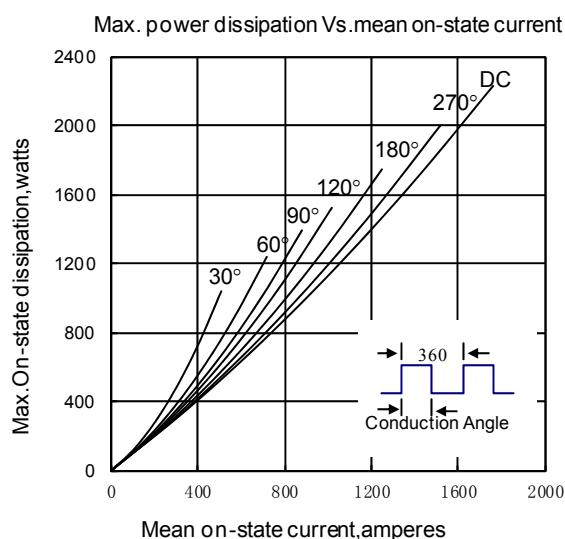


Fig5

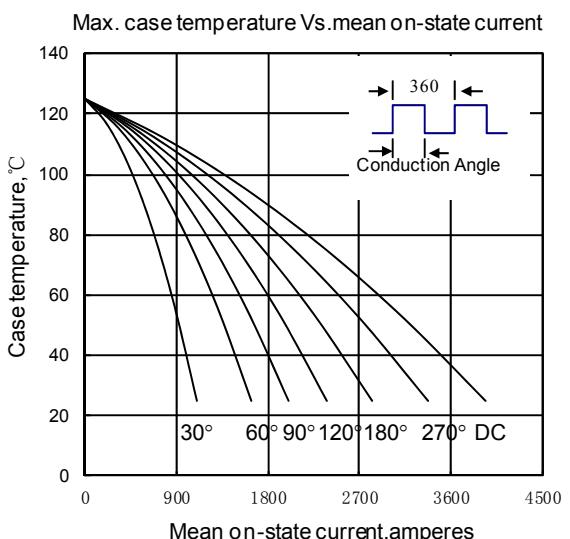


Fig6

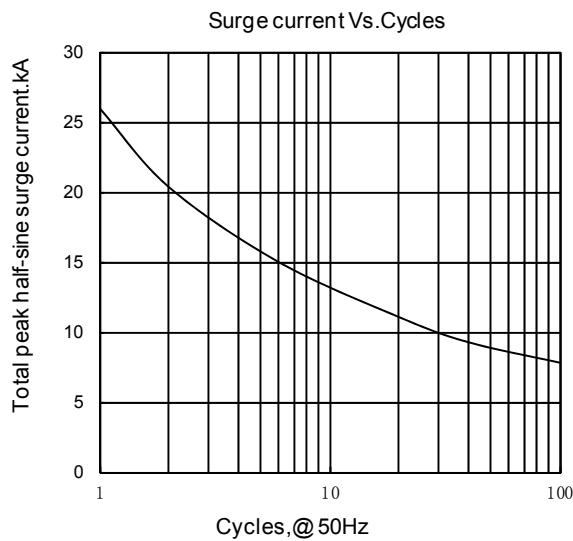


Fig7

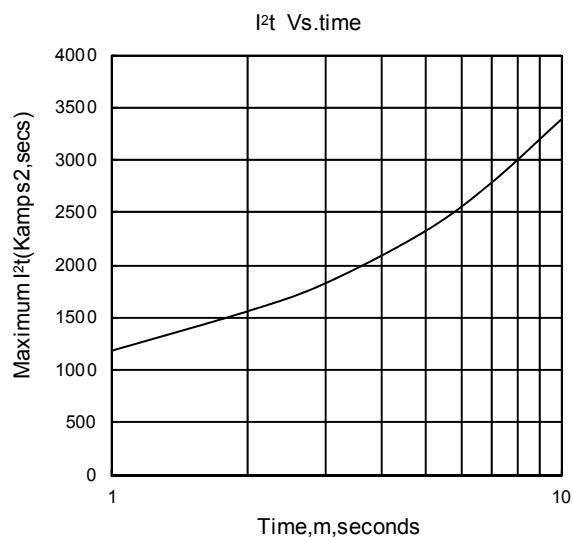


Fig8

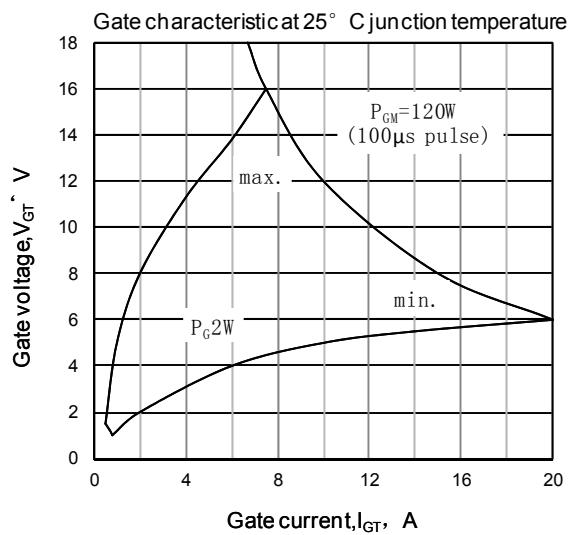


Fig9

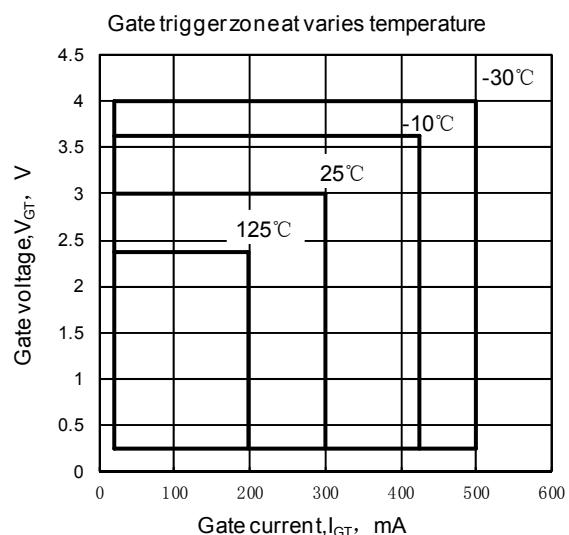


Fig10

Outline: