


## Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

## Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$  **1640A**  
 $V_{DRM}/V_{RRM}$  **3100~4200V**  
 $I_{TSM}$  **20 kA**  
 $I^2t$  **2000 10<sup>3</sup>A<sup>2</sup>S**

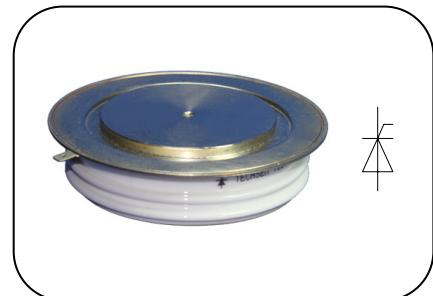

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1640	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	3100		4200	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			120	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			20	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$				2000	$A^2s \times 10^3$
$V_{TO}$	Threshold voltage		125			1.17	V
$r_T$	On-state slope resistance					0.35	$m\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=3000A$ , $F=32kN$	25			2.60	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	V/ $\mu$ s
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 2000A, Gate source 1.5A $t_r \leq 0.5\mu s$	125			200	A/ $\mu$ s
$Q_{rr}$	Recovery charge	$I_{TM}=2000A$ , tp=2000 $\mu$ s, $di/dt=-20A/\mu s$ , $V_R=50V$	125		2000		$\mu C$
$I_{GT}$	Gate trigger current		25	40		300	mA
$V_{GT}$	Gate trigger voltage	$V_A=12V$ , $I_A=1A$		0.8		3.0	V
$I_H$	Holding current			20		300	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled				0.0130	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Clamping force 32kN				0.0035	
$F_m$	Mounting force			27		34	kN
$T_{stg}$	Stored temperature			-40		140	$^{\circ}C$
$W_t$	Weight				820		g
Outline		KT60cT65					

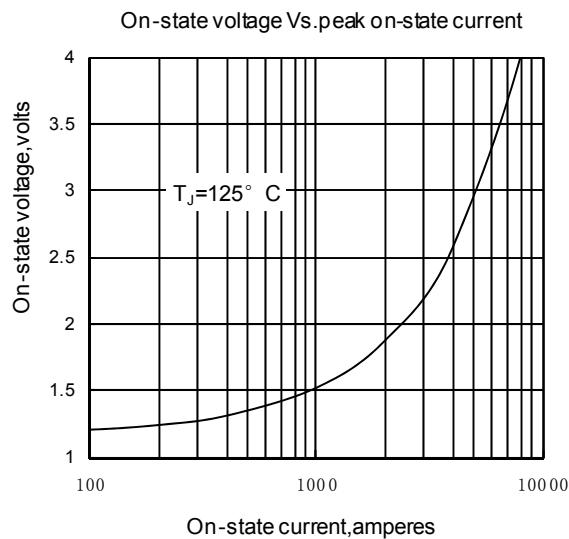


Fig1

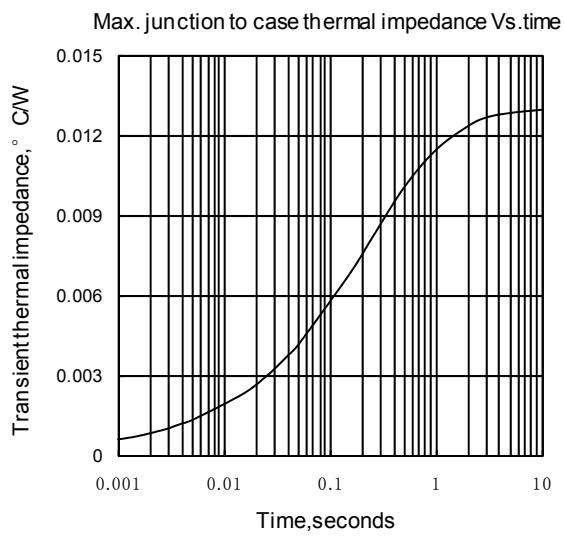


Fig2

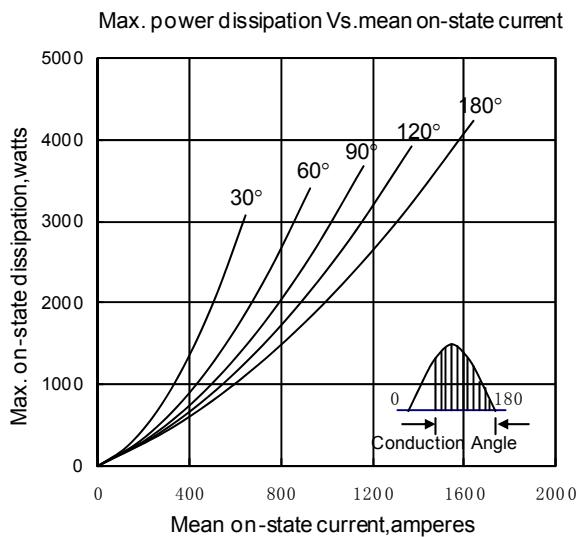


Fig3

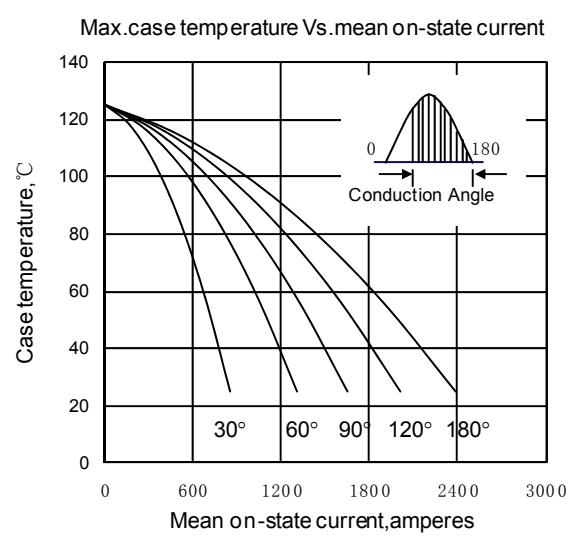


Fig4

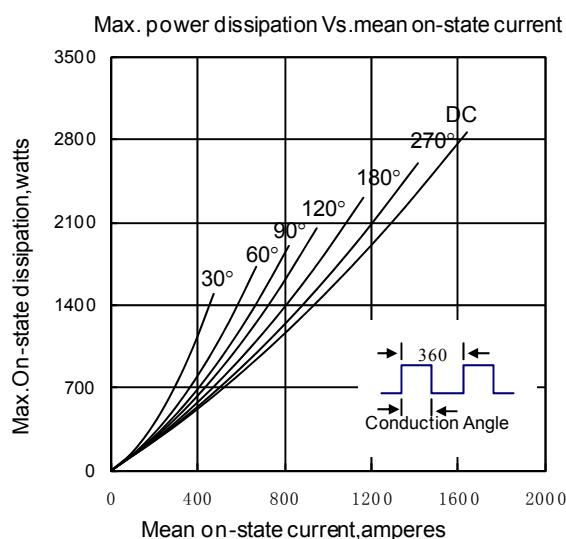


Fig5

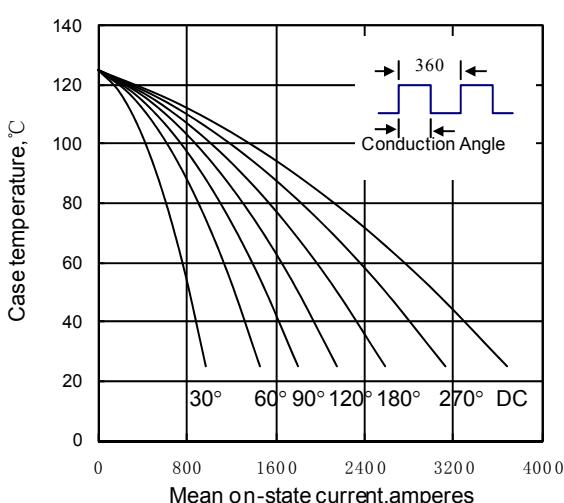


Fig6

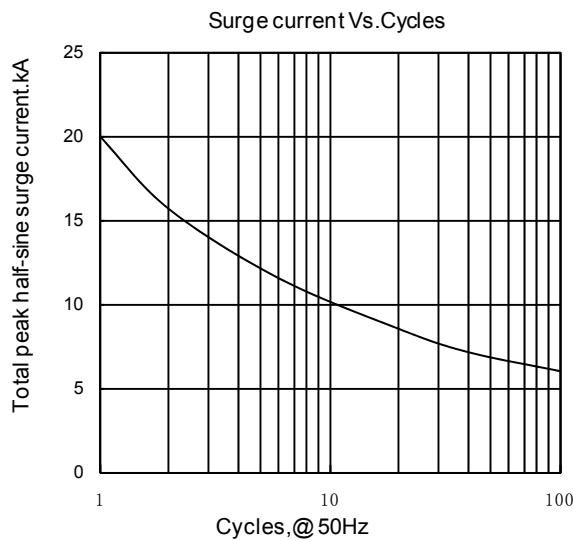


Fig7

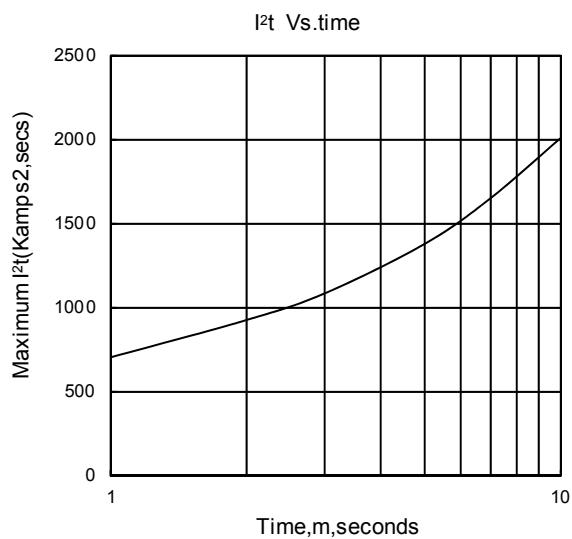


Fig8

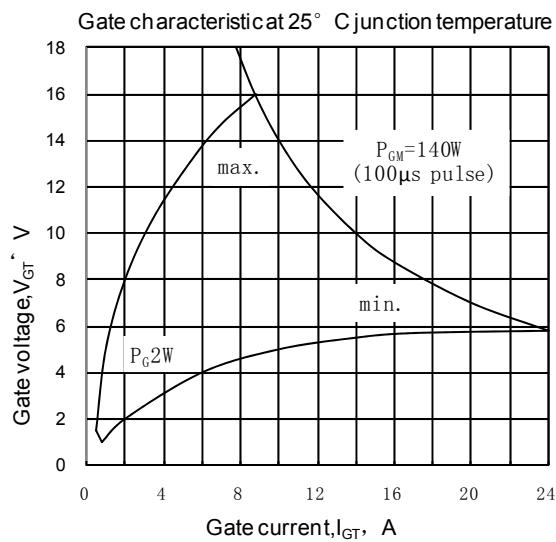


Fig9

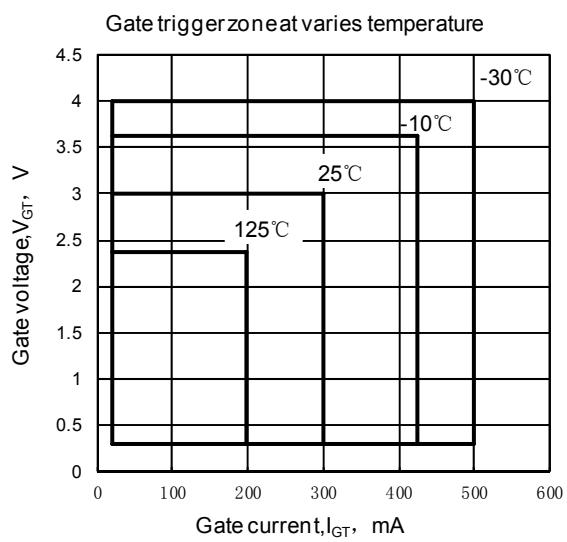


Fig10

**Outline:**