

### Features

- Interdigitated amplifying gates
- Fast turn-on and high  $dI/dt$
- Low switching losses

### Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters

$I_{T(AV)}$	<b>1750A</b>
$V_{DRM}/V_{RRM}$	<b>800~1800V</b>
$t_q$	<b>18~50μs</b>
$I_{TSM}$	<b>18 kA</b>
$I^2t$	<b>1620 10<sup>3</sup>A<sup>2</sup>s</b>



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1750	A
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	800		1800	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			120	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			18	kA
$I^2t$	$I^2t$ for fusing coordination					1620	$A^2s \cdot 10^3$
$V_{TO}$	Threshold voltage		125			1.48	V
$r_T$	On-state slope resistance					0.28	$m\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=3000A$ , $F=28kN$	25			3.15	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	$V/\mu s$
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 2500A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			1200	$A/\mu s$
$Q_{rr}$	Recovery charge	$I_{TM}=2000A$ , tp=2000μs, $di/dt=-60A/\mu s$ , $V_R=50V$	125		800		$\mu C$
$t_q$	Circuit commutated turn-off time	$I_{TM}=1500A$ , tp=1000μs, $V_R=50V$ $dv/dt=30V/\mu s$ , $di/dt=-20A/\mu s$	125	18		50	$\mu s$
$I_{GT}$	Gate trigger current	$V_A=12V$ , $I_A=1A$	25	40		300	mA
$V_{GT}$	Gate trigger voltage			0.9		3.5	V
$I_H$	Holding current			20		500	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 28kN				0.016	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.004	
$F_m$	Mounting force			21		30	kN
$T_{stg}$	Stored temperature			-40		140	$^{\circ}C$
$W_t$	Weight				650		g
Outline		KT54cT60					

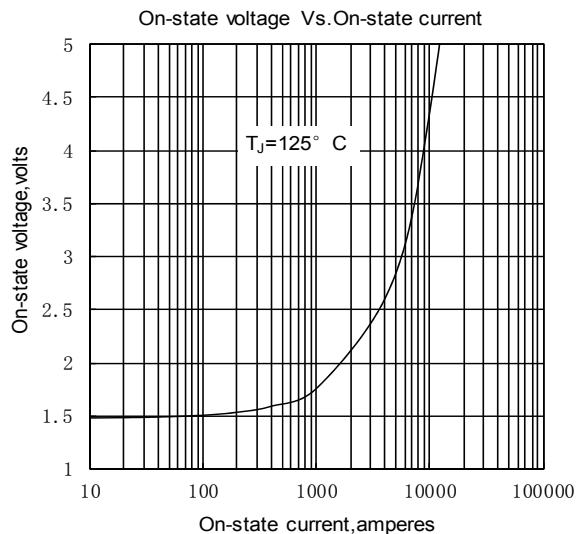


Fig. 1

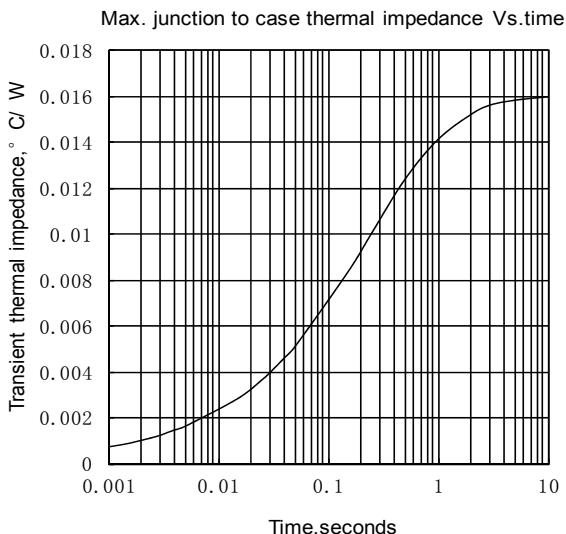


Fig. 2

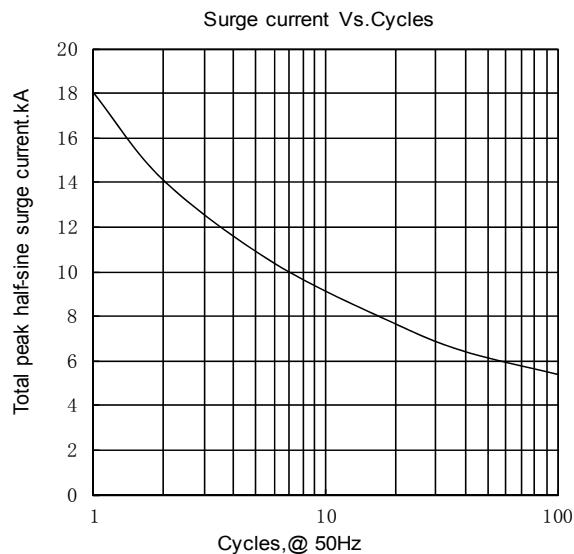


Fig. 3

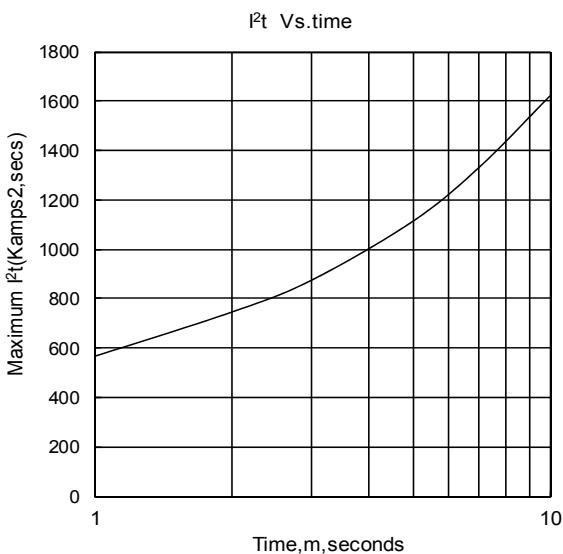


Fig. 4

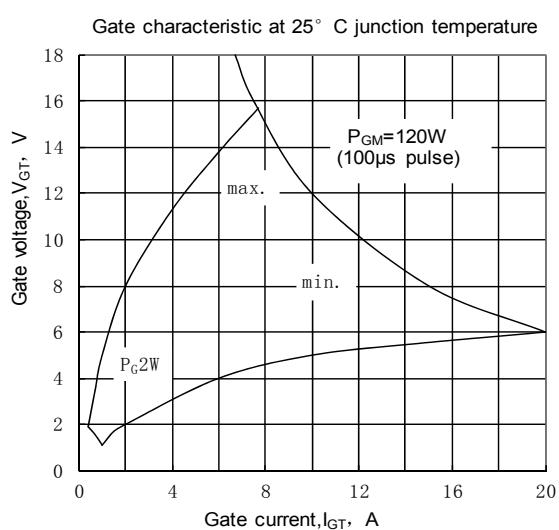


Fig. 5

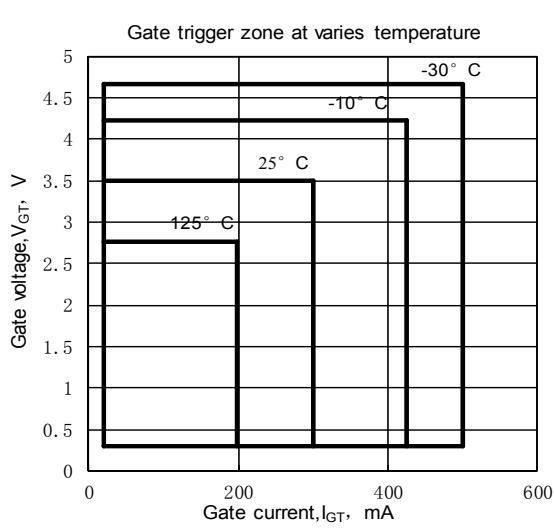


Fig. 6

**Outline:**