

## Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

## Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$	<b>360A</b>
$V_{DRM}/V_{RRM}$	<b>1100~1800V</b>
$I_{TSM}$	<b>4.65 kA</b>
$I^2t$	<b>108 <math>10^3 A^2S</math></b>



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_c=70^{\circ}C$				360	
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	1100		1800	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	at $V_{DRM}$ at $V_{RRM}$	125			16	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			4.65	kA
$I^2t$	$I^2t$ for fusing coordination	$V_R=0.6V_{RRM}$				108	$A^2s \times 10^3$
$V_{TO}$	Threshold voltage		125			0.85	V
$r_T$	On-state slope resistance					1.20	$m\Omega$
$V_{TM}$	Peak on-state voltage	$I_{TM}=600A, F=5.0kN$	25			2.10	V
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			1000	$V/\mu s$
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 600A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			100	$A/\mu s$
$Q_{fr}$	Recovery charge	$I_{TM}=600A, tp=2000\mu s, di/dt=-20A/\mu s,$ $V_R = 50V$	125		800		$\mu C$
$I_{GT}$	Gate trigger current	$V_A=12V, I_A=1A$	25	30		200	mA
$V_{GT}$	Gate trigger voltage			0.8		2.0	V
$I_H$	Holding current			20		150	mA
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 5.0kN				0.080	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.020	
$F_m$	Mounting force			3.3		5.5	kN
$T_{stg}$	Stored temperature			-40		140	$^{\circ}C$
$W_t$	Weight				60		g
Outline		KT19aT					

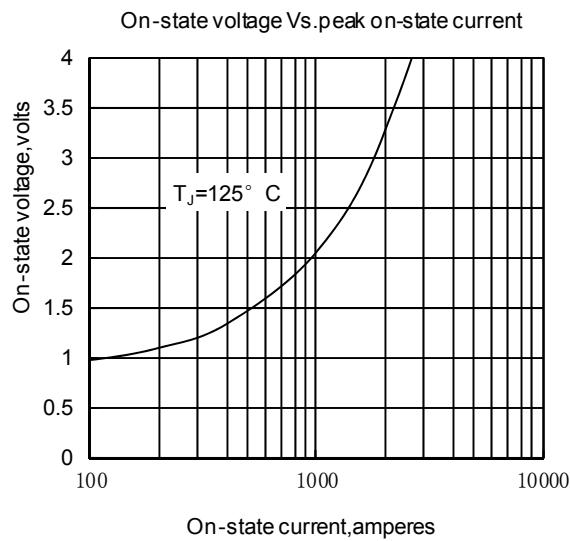


Fig1

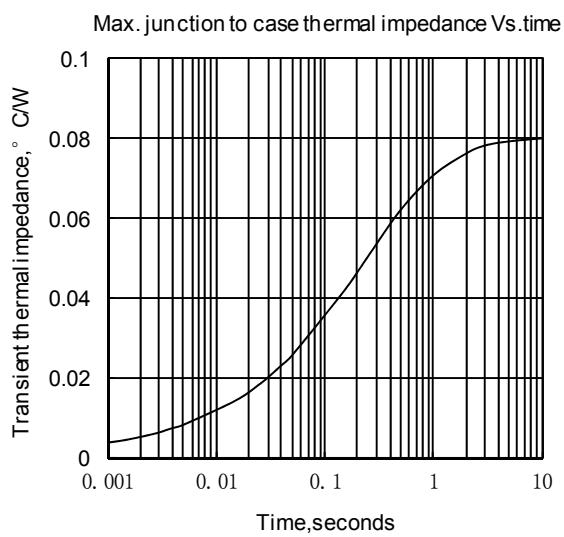


Fig2

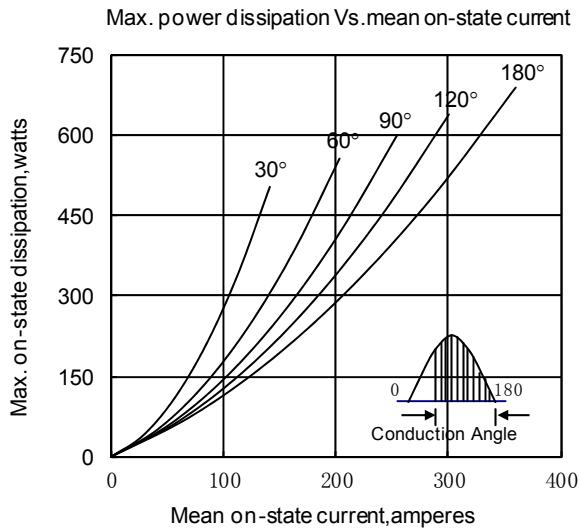


Fig3

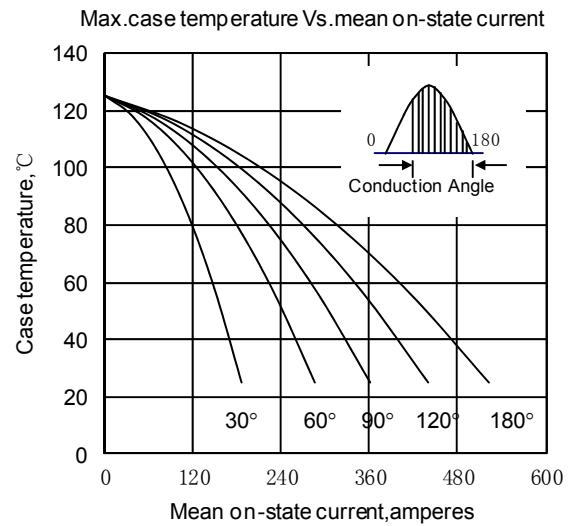


Fig4

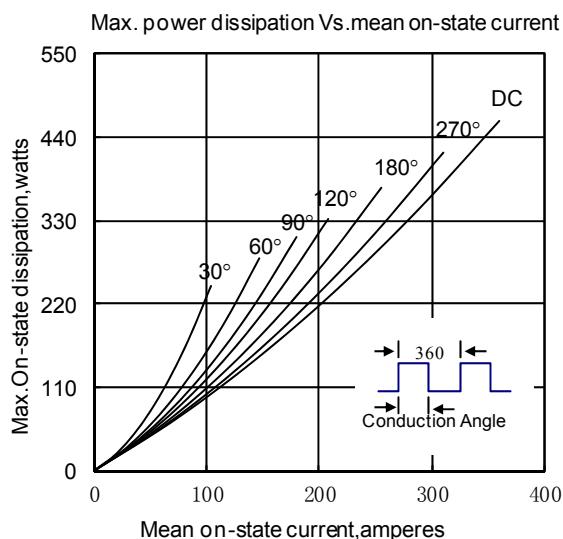


Fig5

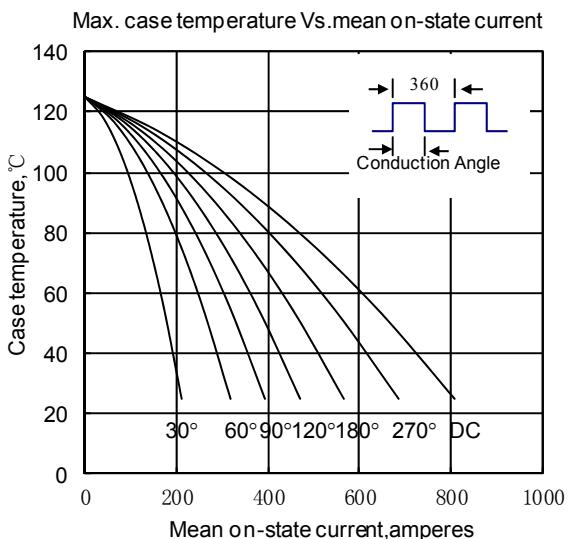


Fig6

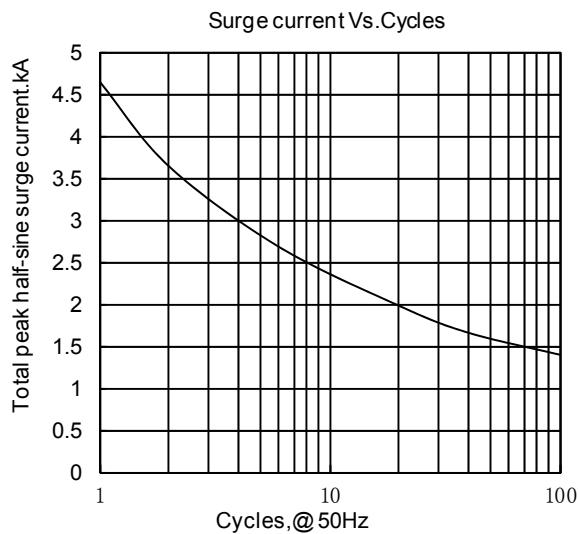


Fig7

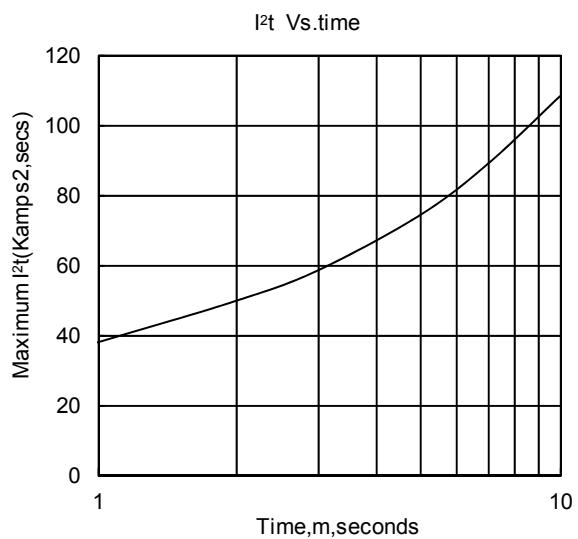


Fig8

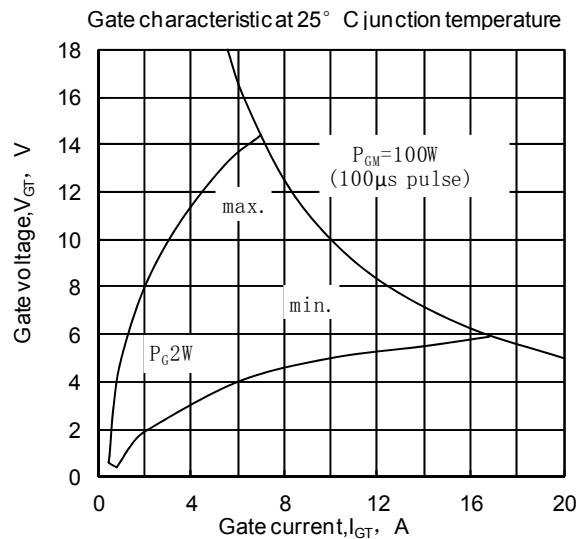


Fig9

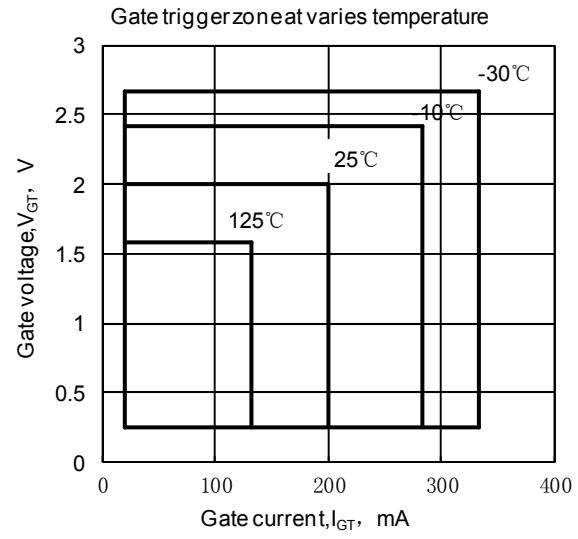


Fig10

**Outline:**