


Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

I_{F(AV)}	1010A
V_{RRM}	200~1000V
I_{FSM}	7 kA
I²t	245 10³A²S

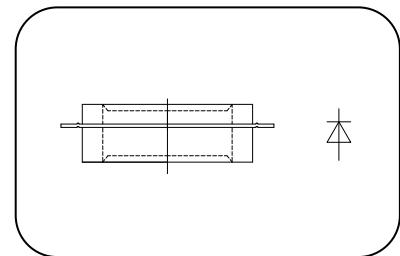

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT	
				Min	Type	Max		
I _{F(AV)}	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =55°C T _C =85°C	150			1320	
							1010 A	
V _{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +100V		150	200		1000 V	
I _{RRM}	Repetitive peak current	V _{RM} = V _{RRM}		150			40 mA	
I _{FSM}	Surge forward current	10ms half sine wave		150			7 kA	
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}					245 A ² s*10 ³	
V _{FO}	Threshold voltage			150			1.06 V	
r _F	Forward slop resistance						0.31 mΩ	
V _{FM}	Peak on-state voltage	I _{FM} =1500A, F=15.0kN		25			1.8 V	
Q _{rr}	Recovery charge	I _{FM} =2000A, tp=2000μs, di/dt=-20A/μs, V _R =50V		150	1800		μC	
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 15.0kN					0.035 F _m	
R _{th(c-h)}	Thermal resistance case to heat sink						0.010 F _m	
F _m	Mounting force				10		20 kN	
T _{stg}	Stored temperature				-40		160 °C	
W _t	Weight					110	g	
Outline	KA32							

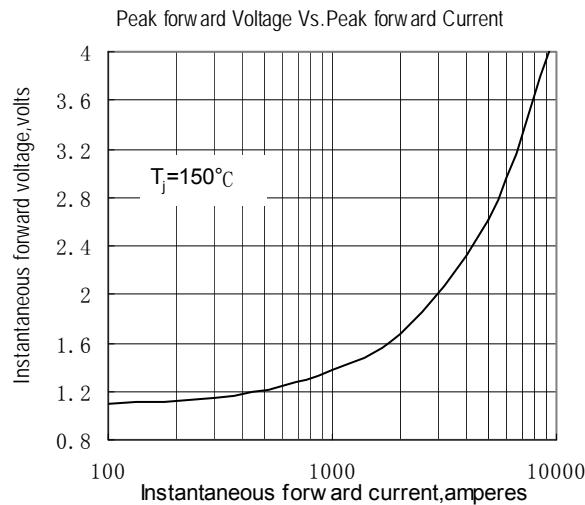


Fig.1

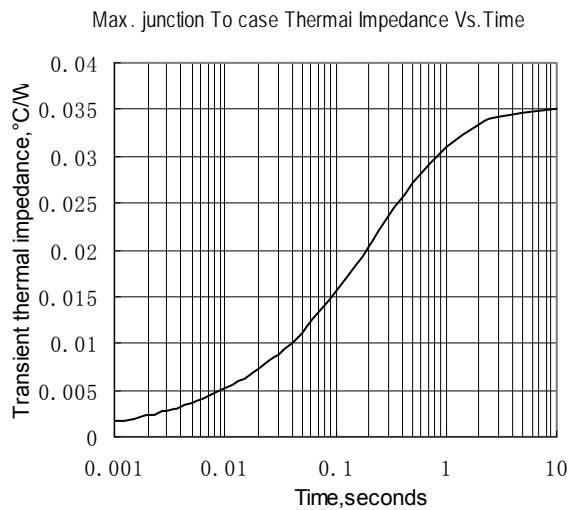


Fig.2

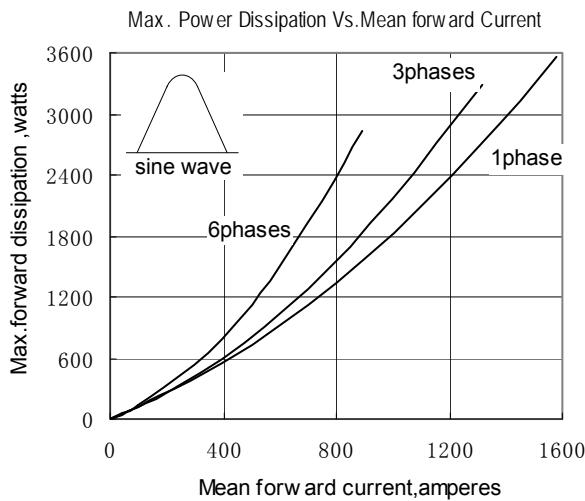


Fig.3

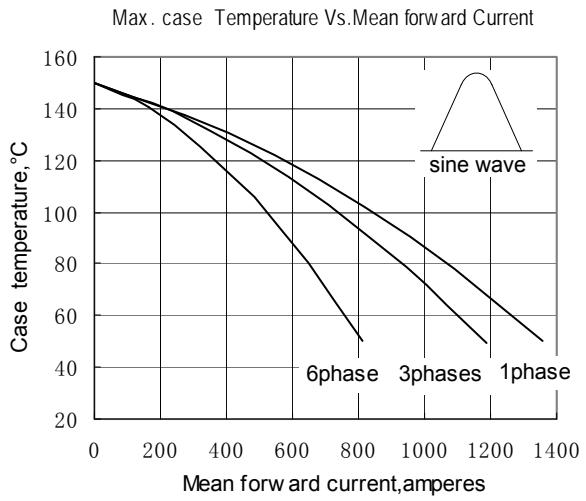


Fig.4

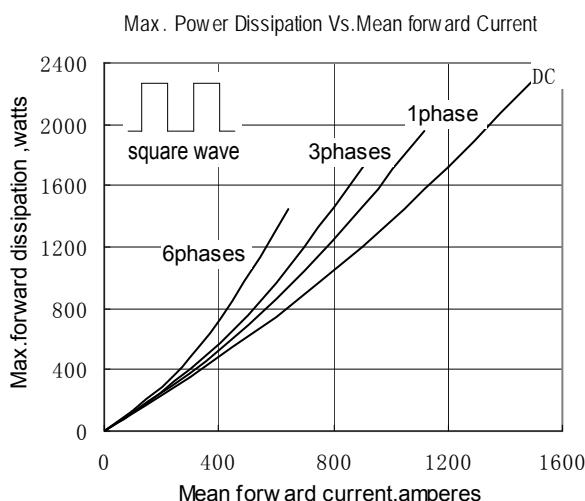


Fig.5

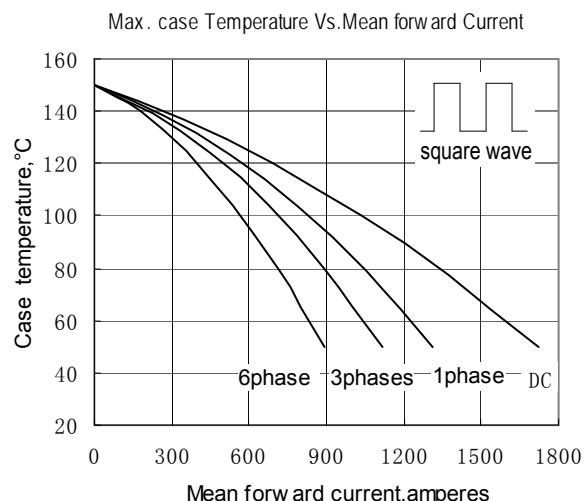


Fig.6

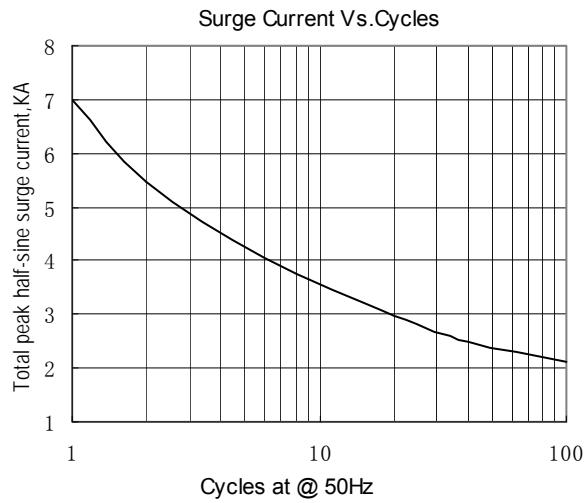


Fig.7

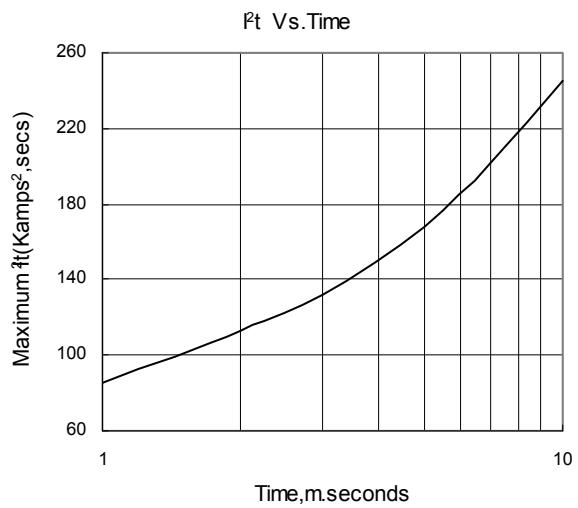


Fig.8

Outline: